

200 LT SINGLE DRUM HEATER NON ATEX (SFV-10)



Consisting of two half-shells hinged metal and mounted on wheels, the drum heater can be opened in two halves to allow access of the drum to the inside. For the extraction of the product contained in the drum the heater are provided with two removable lids in correspondence of the caps of the drum.

TECHNICAL DATA

Power: 4 kW

Voltage: 400/3 V

Current: 10 A

Temperature: from 0°C to 120 °C

Regulation: ON / OFF with thermostat 0°C - 120°C

Protection: IP 55 on the control panel mounted on the heater



FEATURES

Diameter: 780 mm

Height: 1000 mm

Weight: 84 kg


Material: painted carbon steel

Main switch: three-pole switch with door lock

Timer: daily and weekly

Thermal insulation: wool min. 35mm thick - density 40 kg / m

Installation: internal or external under a roof structure

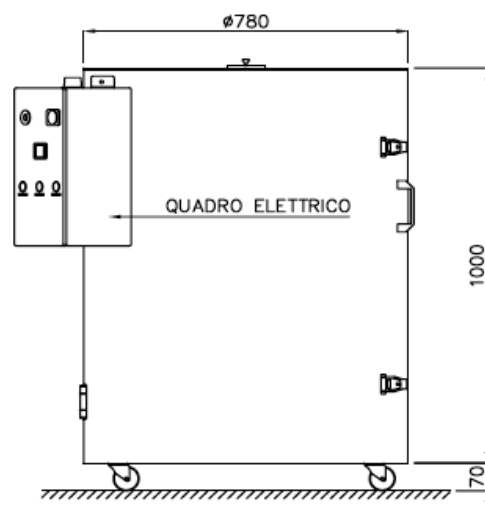

HEALTH AND SAFETY

All single drum heaters are manufactured in accordance with EC Directives. It is recommended not to put or keep in operation the drum heater during the filling, refilling or drum emptying. It is also recommended not to keep the power cable plugged in during the movement of the drum heater. In order to prevent spills of substances due to rise in their temperature it is recommended not to fill to the brim the drum and to work always in a well ventilated area.

PRODUCT ADVANTAGES

Specially created for steel drums. Designed to heat from the outside, avoiding contact with the substances contained inside the drum. It does not contaminate nor burn the substances in the drum. Manufactured in painted carbon steel with thermal insulation in mineral wool. Our drum heaters comply with EC standards.